

产品特性/Pro r

IP6K9K

350A 85°C长时间载流能力

12-750VDC

900VDC

1000MΩ (1000VDC) , IEC 60664-

1

PWM

线圈参数 / Coil parameters


| VDC | VDC | VDC | W |
|-------|-----|------|-----------|
| 9~24V | 9 | ≥4.5 | 26W 3W |

-40°C ~ 85°C)

外形图、安装孔尺寸 / Outline drawing, mounting hole size

/Unit mm

性能曲线图 Performance graph

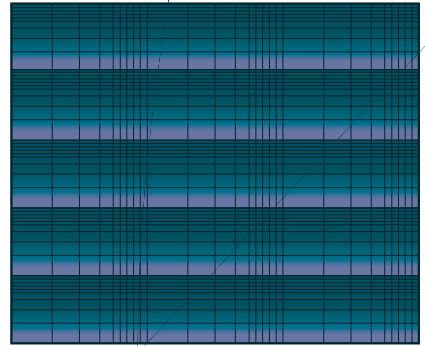

85°C , 150mm²



使用注意事项 Precautions for use

1

| | | | | | |
|------------|-------------|-----------|-----|------|-------------|
| M5螺钉 (内螺纹) | 3N·m 4N·m | Ø5.0~Ø5.5 | 5mm | M5螺钉 | 3N·m ~ 4N·m |
| M8 | 10N·m 12N·m | Ø8.0~Ø8.5 | 5mm | | |

2

150m

3

5mm